



August 30, 2011

Plainview ISD  
Plainview High School Renovation and Addition  
Plainview, Texas

Bid Date: August 31, 2011 (\*note date change in Addendum #1)  
Bid Time: 2:00  
Bid Location: Southwest General Contractors  
223 SW 4th  
Amarillo, Texas 79101



**ChapmanHarvey**  
ARCHITECTS, INC.

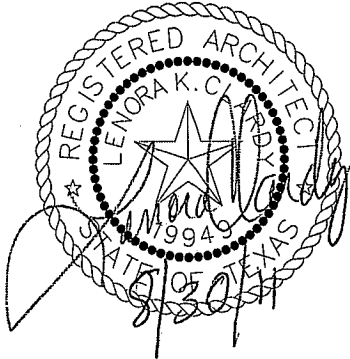

### Addendum 3

#### Architectural Items:

1. Finish for the display cabinets is to be clear anodic. Tack board surfaces to be natural cork 1/4" thick.
2. Exterior finish for infill panels at auditorium wall is to be EIFS as noted on section 4/A124. Sheathing to be 1/2" gypsum sheathing per previous addenda.
3. Contractor to provide infill for louvres at the west and east sides of the existing mechanical room. Approximate sizes are 7'-0" x 12'-0" and 12'-0" x 12'-0" (contractor verify). Infill to be similar to section 4/A124.
4. Section 095123 - Axiom Classic trim to be 4". Section 094123 - Ceiling tiles to be equal to USG Interiors, Inc. – RADAR or Armstrong World Industries, Inc. – MINABOARD
5. Contractor to provide an allowance of \$15,000 for providing and installing a new wheelchair lift at stage. Model number, location, power requirements and details to be provided upon final acceptance of the scope of work in the auditorium.
6. Finish for stairway landings to be the same as scheduled for floors in the spaces.

612 Broadway

Lubbock, Texas 79401

806.749.1153 fax 749.1866

architect@chapmanharvey.com